




Reverse hooks are made from extruded aluminium and are fixed by a sturdy socket head bolt. **Wall brackets** are mild steel and are fixed to an extruded aluminium front cover. These brackets have integral $\frac{1}{4}$ " x $\frac{3}{4}$ " fixing slots. Intermediate brackets can be fixed as required. Moulded **end caps** finish the exposed ends of the front cover rail. The **finish** of all elements is powder coated in colour combinations from the full RAL range. **Wall fixings** are to be supplied by installer to suit site conditions. On **installation** hooks are usually centred at $3\frac{3}{4}$ " or $7\frac{1}{2}$ " but can be supplied at any centre required. Units are available in any length and can be used with our **Elliptical**, **VZ** and **CS** ranges of benching.



exploded view showing hook fixing

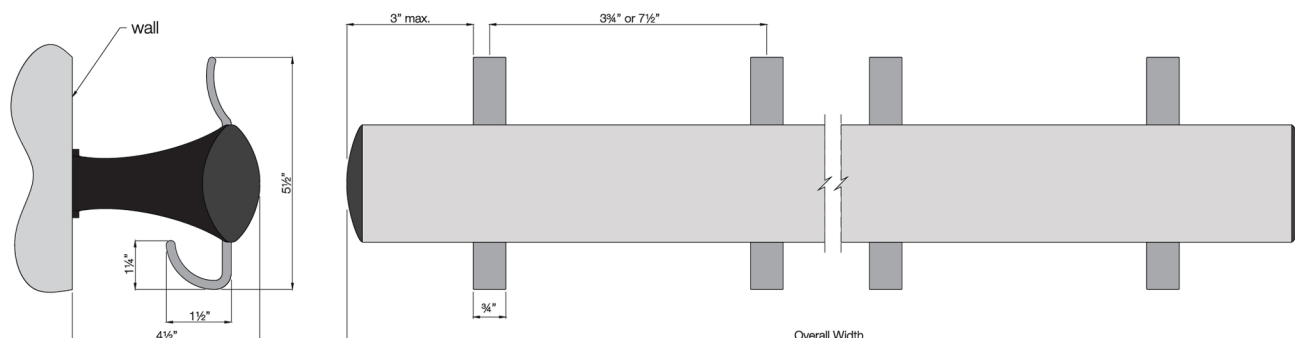